


PENSTOCK OPERATING OPTIONS MOUNTING DIRECTLY ON PENSTOCK



The Aquafix penstocks are used in surface water, sewerage systems, (sewerage) water treatment system etc. to (temporarily) block or allow to pass water. They are manufactured from high quality HDPE and they will be reinforced with Stainless Steel 316L profiles. Standard, the penstocks are fitted with a SS316L non-rising spindle

This overview shows the operating options, which are mounted directly on the penstock. Remote operation is also an option. This is done by means of spindle extensions. Via this way, the penstock can be operated on a higher (operation) deck.

In case of ambiguities or if the penstock needs to be operated with an electric actuator or a gearbox, we advise you to consult our product specialist.

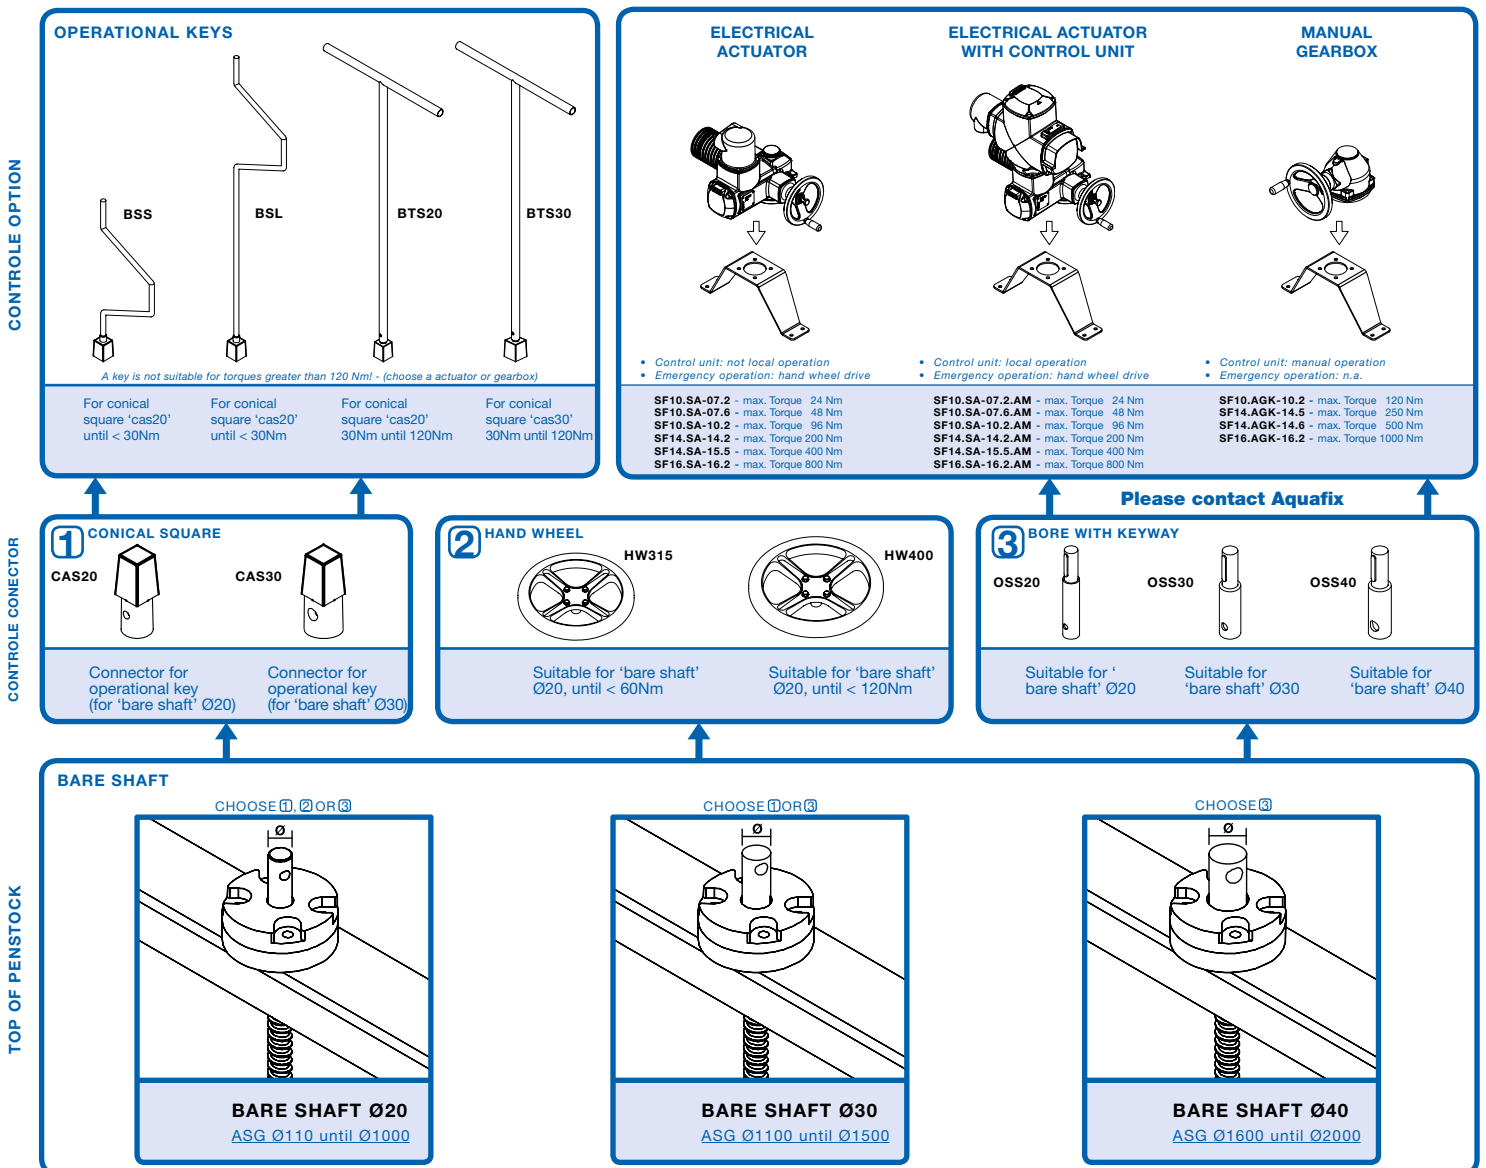

Dimensions in millimeters, weights in kilograms. Subject to changes in images, dimensions and description. Placement, installation and use in accordance with our regulations.